

PLASTIC SCINTILLATOR CASTING RESIN EJ-290

EJ-290 is a partially-polymerized plastic scintillator formulated for final curing in the user's facilities at a relatively low temperature. It is supplied in a kit form consisting primarily of the scintillator resin and a polymerization initiator. Upon combining the ingredients using the provided instructions, a solid plastic scintillator can be made at a relatively low polymerization temperature. The final scintillation and physical properties are similar to those of the conventional blue emitting plastic scintillator EJ-212.

Please see our website for instructions on how to use EJ-290. Typical shelf life for this product is approximately 6 months when stored under recommended conditions.



PROPERTIES	EJ-290
Light Output (% Anthracene)	58
Scintillation Efficiency (photons/1 MeV e ⁻)	9,000
Wavelength of Maximum Emission (nm)	423
Decay Time (ns)	~ 3
H Atoms per cm ³ (×10 ²²)	5.17
C Atoms per cm ³ (×10 ²²)	4.67
Electrons per cm ³ (×10 ²³)	3.33
Density (g/cm ³)	1.023


PACKAGE SIZES

500 mL

1000 mL

Polymer Base	Polyvinyltoluene
Refractive Index	1.58
Softening Point	75°C
Vapor Pressure	Vacuum-compatible
Coefficient of Linear Expansion	7.8 × 10 ⁻⁵ below 67°C

EJ-290 EMISSION SPECTRUM

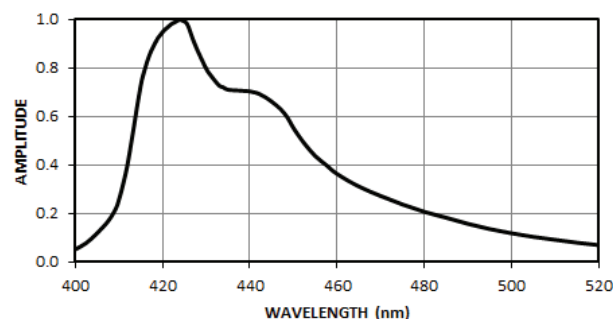

Revision Date: Jul 2021



ELJEN TECHNOLOGY

1300 W. Broadway, Sweetwater, TX 79556

www.eljentechnology.com • eljen@eljentechnology.com

Toll Free (USA): (888)-800-8771 • Tel: (325)-235-4276 • Fax: (325) 235-0701

