

FAST NEUTRON DETECTOR EJ-410

EJ-410 is specifically designed for detecting fast neutrons while being nearly insensitive to gamma radiation. The detector consists of zinc sulfide phosphor embedded in a hydrogenous polymer matrix structured in a series of concentric cylinders of clear plastic to facilitate light collection. Recoil protons generated in the detector produce scintillation pulses in the phosphor. Electrons scattered in the detector by gamma radiation interact very weakly with the ZnS:Ag particles, providing scintillation pulses easily eliminated from the counting systems by setting an appropriate threshold.

EJ-410 is an inert plastic disc which can be mounted to a photomultiplier tube either directly or by means of a suitable light guide. Optical greases, silicone rubbers or epoxies may be used with the EJ-410. A variety of blue-sensitive photomultiplier tubes may be used.

GAMMA DISCRIMINATION


Gamma scintillation pulses are usually smaller than those generated by neutrons. In gamma fields below 1 R/hr, pulse height discrimination can easily be used to reject the gamma pulses. However, the randomly generated recoil protons will generate a broad scintillation pulse height spectrum. Therefore, in high gamma fields, the simultaneous detection of multiple gammas can generate pulse heights large enough to be in the normal neutron spectrum. The consequent higher discriminator settings needed will then reduce the neutron detection efficiency. Additional gamma rejection may be achieved by using time constants of a few microseconds.



PROPERTIES	EJ-410
Wavelength of Maximum Emission (nm)	450
Decay Time, Short Component (μ s)	0.2
Maximum Operating Temperature ($^{\circ}$ C)	90

STANDARD SIZES	
Thickness (mm)	15.9
Diameter (mm)	25, 38, 50, 76, 125

EJ-410 FAST NEUTRON DETECTOR
50 mm Dia.

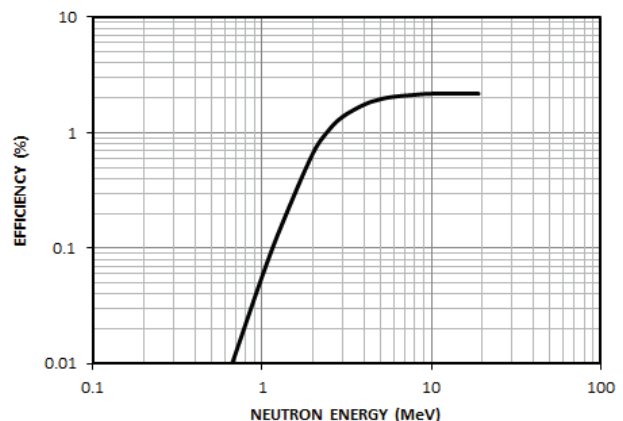

Revision Date: Jul 2021



ELJEN TECHNOLOGY

1300 W. Broadway, Sweetwater, TX 79556

www.eljentechnology.com • eljen@eljentechnology.com

Toll Free (USA): (888)-800-8771 • Tel: (325)-235-4276 • Fax: (325) 235-0701

